



Step 1

Remove all 13 screws from the backside of the EVGA GTX 295. Also remove the retention clip located near the fan. Remember to keep all accessories in case your card needs to be returned to EVGA.

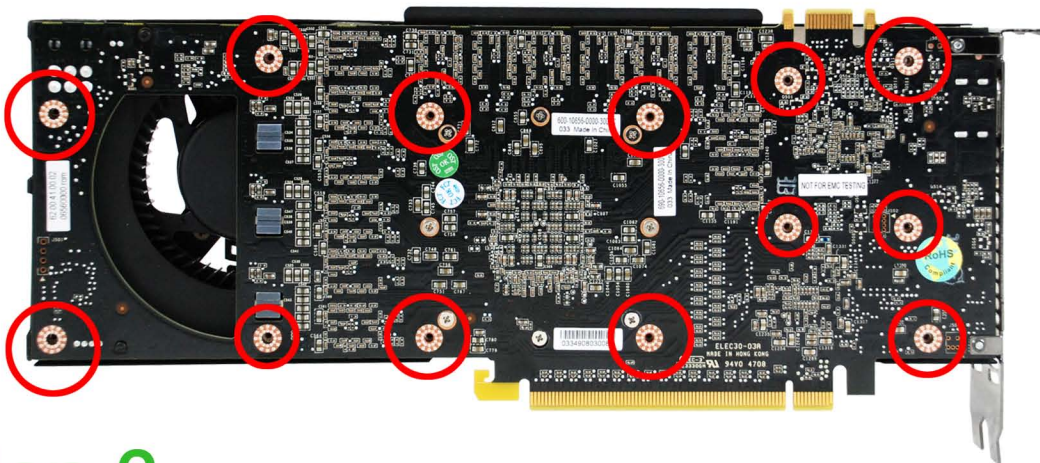

Step 2

Remove both protective covers from the included thermal pad, and place it like so on the GTX295 Backplate. Make sure to not place over the white spacers.

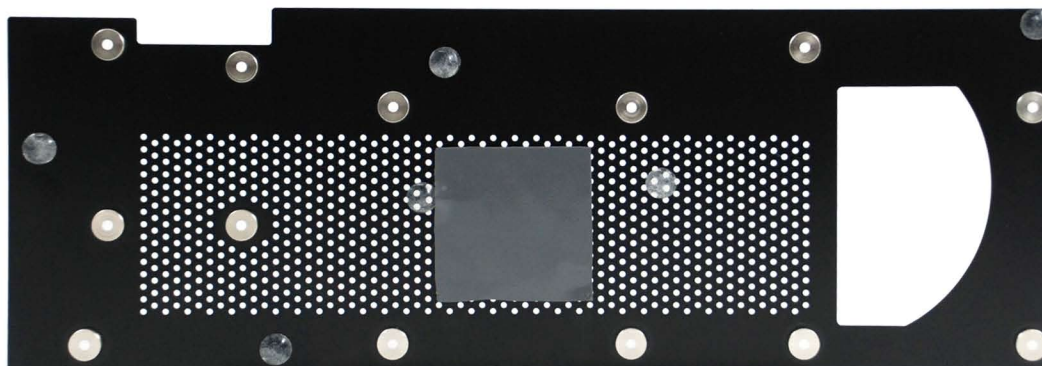

Step 3

Install all 13 screws that are included with the package. The screws circled in orange need to be installed first. Reinstall your card and game!

