



Step 1

Remove all 15 screws indicated below. Remember to keep all accssories in case your card needs to be returned to EVGA.

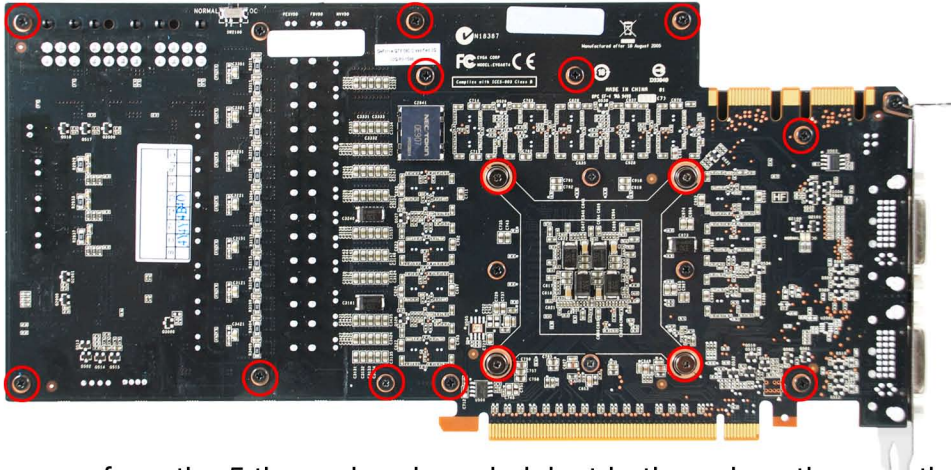


Step 2

Remove the protective covers from the 5 thermal pads and pink strip then place them on the card as seen below.

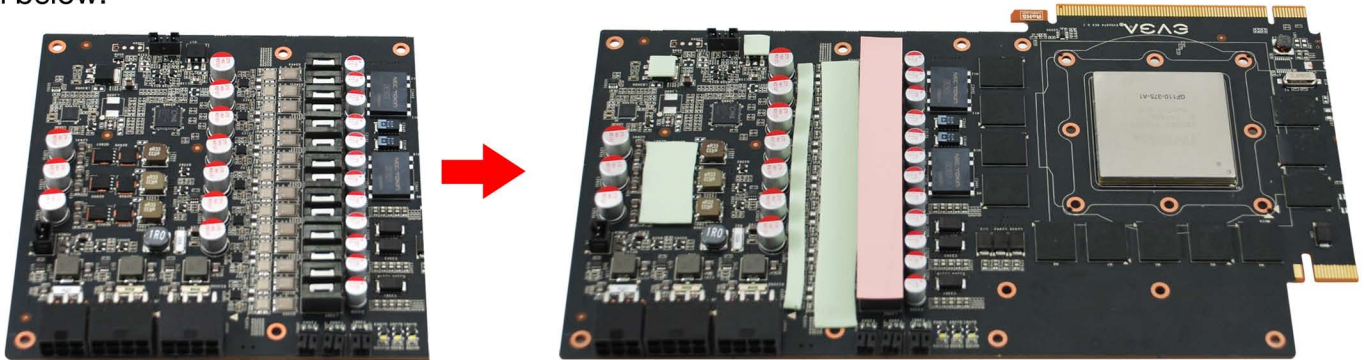

Step 3

Place black heatsink on the rear of the card and the GPU riser around the GPU.

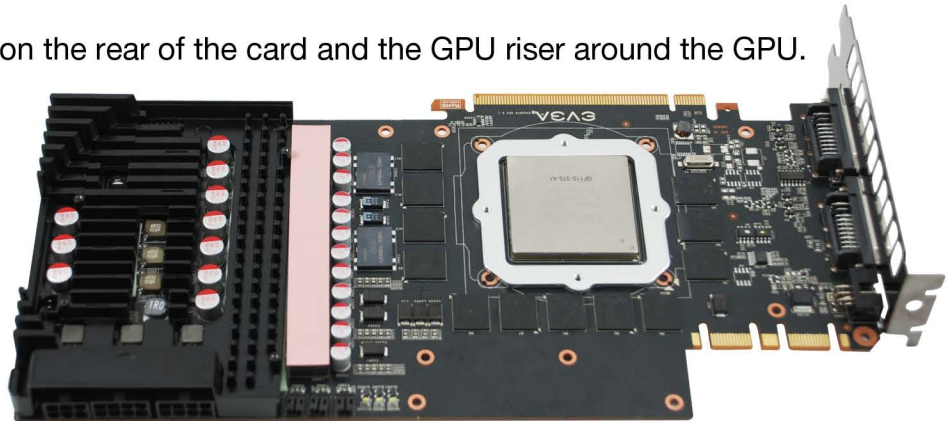

Step 4

Install the 8 included screws. You are now ready for some extreme cooling and benching!

