EVGA. PD03

EVGA's PD03 zero client offers exclusive support to all PCoIP users, providing the best experience regarding overall security and optimized management. Newly redesigned passive cooling and small footprint construction save on work space and require minimal maintenance, thus offering cost savings over standard desktop platforms. With free management console software, stateless performance with full frame rate 3D graphics and HD media, your cloud will be ready today to meet tomorrow's demand.



- Imprivata OneSign Virtual Desktop Access™
- Small foot print design
- Redesigned passive cooled chassis
- Fully configurable with free management console
- · Less than 15W for today's green market
- TAA compliant models available
- Free firmware updates available online

Warranty Satisfaction

- Enterprise RMA service with complementary overnight shipping on all cross-shipments
- 3yr warranty standard with upgrade options available
- 24/7 customer support

True Security

- Data secured with complete control using AES-128-GCM and Salsa-256-Round12 bit encryption
- · All input device activity is controlled by management offering user protected control
- · Configure multiple groups to optimize employee environments and secure executive access
- Integrated Kensington Security slot provides anti-thief support

Flexibility






- Perform updates on clients automatically via management console on your schedule with zero downtime.
- LAN/WAN configurations offer connectivity to your desktop from any location.







SPECS:

- TERA1100 PCoIP® zero client processor
- Memory 128MB XDR RAM
- Dual single-link DVI-I ports
- Integrated Kensington Security Slot
- Four USB 2.0 compliant ports
- One mic in
- One line out/headphone
- · Power & Remote PC restart buttons
- Networking 10/100/1000 Base-T Gigabit ethernet
- Firmware 3.5.1 or newer required

- Single and Dual: 1920x1200@60Hz, Color Depth: 8, 15, 16 or 24bpp.
- Audio Output: 1/8-inch mini jack, full 16 bit stereo
- Input: 1/8-inch mini jack, 8 bit microphone
- Temperature Range: 5C to 40C
- Humidity Range: 20% to 80%
- Safety certifications: UL/cUL/TUV/FCC/RoHS/CE/ C-Tick
- Average Power Usage: 12W

DIMENSIONS:

- Length: 5.1in 129.5mm
- Width: 4.7in 119.4mm
- Height: 2.4in 61mm

ACCESSORIES:

- Power adapter & cord
- Manual on CD
- Visual Guide




PRODUCT WARRANTY

This **EVGA** product has a 3 year limited warranty upon product registration. For more information please visit: www.evga.com/warranty

2001-2012 EVGA Corp. EVGA, the EVGA logo and combinations thereof are trademarks of EVGA Corp. All brands and companies are trademarks of registered Trademarks of their respective companies. EVGA reserves the right to terminate for any and all damages suffered as a result of the violation or default




Hardware Accelerated Performance Supports Maximum Full Frame Rate

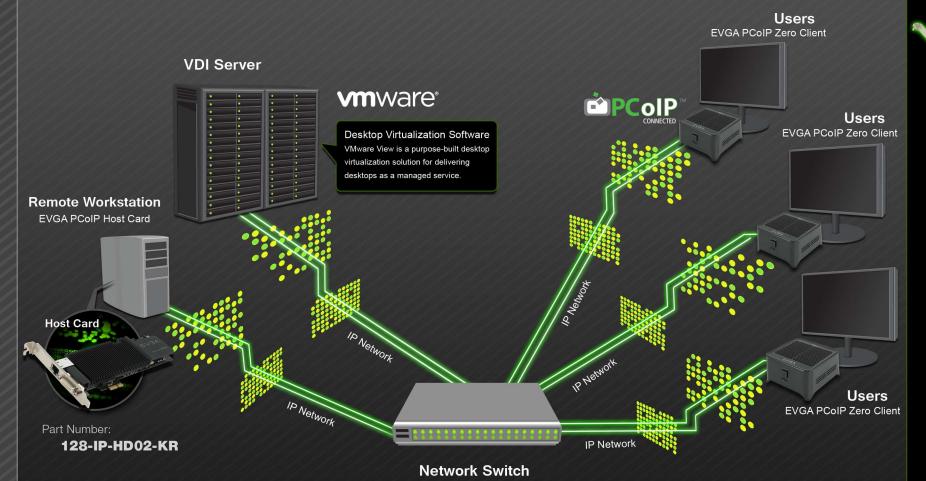

The EVGA PCoIP Zero Client will work in all situations. A device that can fit in your hand will easily handle any VDI or extreme 3D graphics modeling use cases and everything in between. Multiple users can now connect to and utilize any amount of horsepower stored in safe, controlled environments.

For more info please visit: evga.com/PCOIP







Desktop Screen Video and Audio

PCOIP

Desktop Screen Video and Audio

Encode

Compress/ Transmit

Recieve/

Decompress

Decode

Users