
EVGA PDO6

See how cloud computing is taking lead in today's business world with the EVGA PD06 True Zero Client. Offering uncompromised simplicity to your VDI environment enabling 3D graphic applications to support daily work routine with the power of PCoIP Technology. Exclusively for VMware view and workstation solutions, the PD06 is your product of choice. Free up IT management, appreciate a better user experience and have peace of mind knowing your network is secure.





- (6) USB 2.0 compatible ports
- Line out/Headset/MIC (Simultaneous dual audio out)
- Dual display 1920x1200 or single display up to 2560x1600²
- Average power usage of 6W¹
- · Passive heat sink design
- Wake On LAN/USB support
- · Power-on after Power-fail
- Free firmware updates available online

Warranty Satisfaction




- · Enterprise RMA service (Overnight cross-shipping)
- · 3yr warranty standard
- 24/7 customer support

SPECS:

True Security


- Wire speed AES-GCM-128/256 encryption/decryption for network traffic.
- IPv6 supported
- 802.1Q VLAN tagging supports segregating
- Imprivata OneSign Virtual Desktop Access™
- · All activity is controlled by management offering user protected control
- Configure multiple groups to optimize employee environments and secure executive access
- Integrated Kensington Security slot provides anti-thief support³

Flexibility



- Compatible with Tera1 and Tera 2 Host devices
- Fully configurable with free management console
- · Centralized control of clients
- Supporting Teradici RDSH for Microsoft RDS Environments (Dec 2012)
- Perform updates on clients automatically via management console on your schedule with zero downtime.
- LAN/WAN configurations offer connectivity to your desktop from any location.





Width: 6.375in – 161.9mm

Part Number: 126-IP-PD06-KR

Tera 2321 PCoIP® Zero Client processor

- 32-bit 667Mhz DDR3 RAM (512MB)
- 32MB Flash memory
- Dual single-link DVI-D/DVI-I ports
- 2560x1600 (Single Display) 1920x1200 (Dual Display)
- Color Depth: 8, 15, 16, 24bpp
- (6) USB 2.0 Compatible ports
- (1) MIC in port
- (1) Line out (HD Audio)
- (1) Headphone port (HD Audio)
- Zero Client Control Panel for workstation solutions

- Audio output: 1/8-inch mini jack
- Temperature Range: 5C to 40C Humidity range: 20% to 80%
- VESA mount compliant
- Integrated Kensington Security Slot
- Safety Certification: UL/cUL/FCC/RoHS/CE/C-Tick
- Networking 10/100/1000Base-T Gigabit Ethernet
- Average Power usage: 6W
- ¹ With Mouse + Keyboard connected only
- ² Optional cable required for 2560x1600
- ³ Cable not included

DIMENSIONS:

• Length: 6.75in - 171.5mm

Height: 1.625in – 41.3mm

ACCESSORIES:

- Power adapter & cord
- Ethernet cable
- Visual Guide




This **EVGA** product has a 3 year limited warranty upon product registration. For more information please visit: www.evga.com/warranty

all copies of the Software must be immediately returned to EVGA and the Original Purchaser shall be lifted and all damages suffered as a result of the violation or default.




Hardware Accelerated Performance Supports Maximum Full Frame Rate

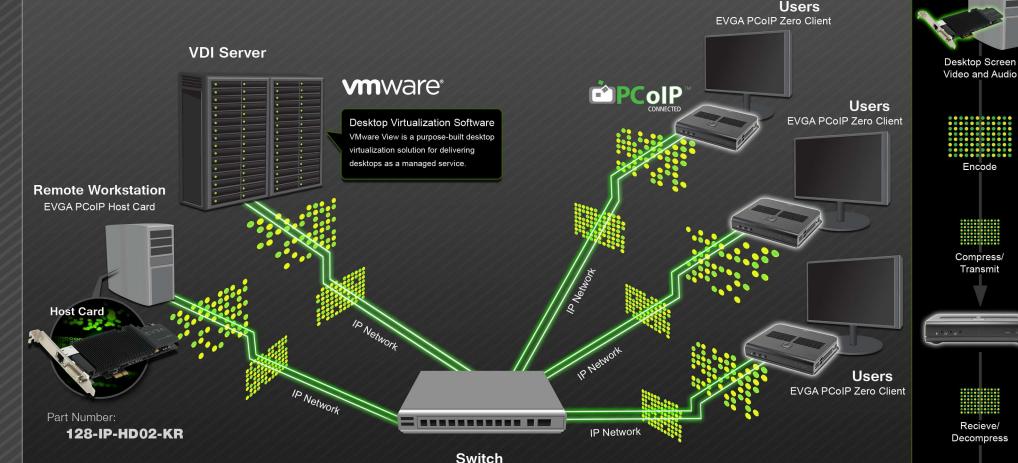

EVGA PCoIP True Zero Clients work to support your business globally across LAN and WAN environments. Experience extreme 3D graphics, CAD, video editing and day to day office applications with the power of PCoIP technology. Multiple users can now connect to and utilize any amount of horsepower stored in safe controlled environments.

For more information visit: evga.com/pcoip









PColP

Encode

Compress/ Transmit

Recieve/

Decode

Users

Desktop Screen Video and Audio