



Step 1

Remove all 12 screws indicated below. Remember to keep all accessories in case your card needs to be returned to EVGA.

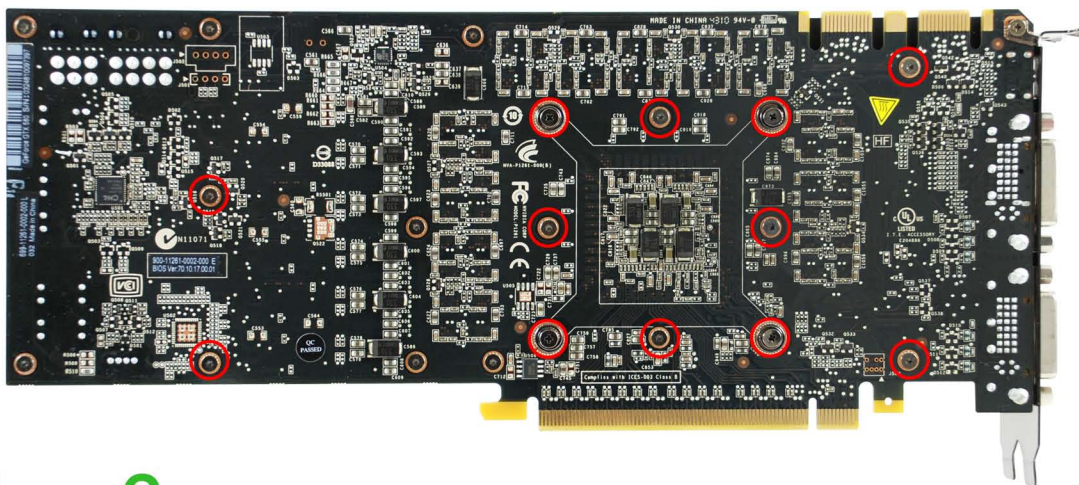

Step 2

Remove both protective covers from the backplate. Place on back of card. Make sure the lip on the backplate curls around the top of the PCB.

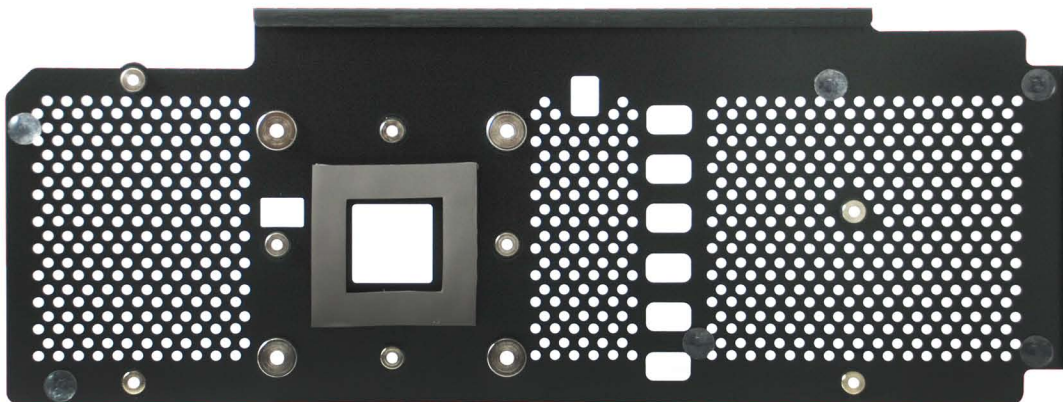

Step 3

Install all 12 screws that were removed. The screws circled in orange need to be installed first. Install your card and now isn't that sweet... you are now leet!!!

