


nForce 680i LT SLI Mainboard

Part Number: **122-CK-NF67**

At A Glance

- **Processor:** Intel Core 2 Extreme, Core 2 Quad, Core 2 Duo, Pentium EE, and Pentium Processors
- **Chipset:** NVIDIA nForce 680i LT SLI
- **Front Side Bus:** 1066/1333
- **Memory:** Dual channel DDR2 533 / 667 / 800 and SLI-Ready Memory with EPP x 4 DIMMs, Max 8GBs
- **Expansion Slots:** 2 x PCIe x16, 2 x PCIe x1, 2 x PCI
- **IDE:** ATA133 x 1
- **Serial ATA(SATA)/RAID:** Serial ATA II x 6 with RAID 0, 1, 0+1, 5, JBOD, eSATA Ready
- **Audio:** 7.1 channel, Azalia (HDA)
- **LAN:** Native Gigabit Ethernet x 1
- **USB 2.0:** x 6
- **IEEE1394:** 1394a x 1
- **Back Panel I/O Ports:** 1 x PS/2 keyboard 1 x PS/2 mouse 1 x 1394a 4 x USB 2.0 1 x RJ45 1 set 7.1 channel Audio jacks (6 jacks + 1 S/PDIF output)
- **Form Factor:** ATX (12" x 9.6")

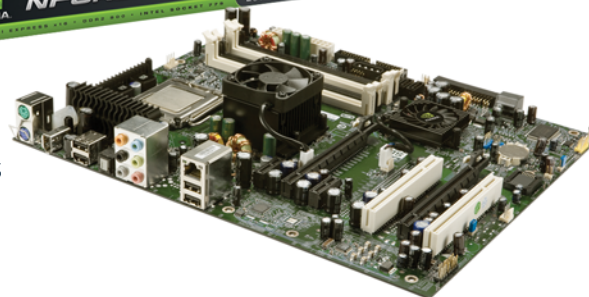

- Dual Channel DDR2
- 7.1 Channel - HD Audio
- 2 16x PCIe GPU slots
- Firewire 1394a

Driver Support

- NVIDIA nForce chipset driver for the 680i LT SLI chipset
- HD Audio Drivers

Dimensions

- Length: 12in
- Width: 9.6in

Support for Intel Core 2 Extreme, Core 2 Quad, Core 2 Duo, Pentium EE and Pentium processors.

Support for NVIDIA SLI-Ready Memory with EPP

Supports dual channel DDR2 533/667/800 SLI-Ready Memory. Supports up to 8GBs DDR2 Memory.

Additional Features

- NVIDIA® MediaShield storage technology
- NVIDIA® DualNet technology
- 1 Gigabit Ethernet port
- NVIDIA® nTune™ Performance Application
- TCP/IP acceleration
- NVIDIA® FirstPacket technology

Gaming
Imaging
3D
Video
Entertainment
Photos
Graphics